

SPECIFICATION

Product Name

Single power connector

Part No

SD120 Series

一、Outline and dimensions: Outline and dimensions of the connector is shown on the following drawing

二、Technical Parameters:

1. Product Specifications

1-1.Rated current(Amperes): 120A

1-2.Rated voltage(Volts): 600V

1-3.Insulation Resistance:5000MΩ

1-4.contact Resistance(micro-ohms): <140

1-5.Voltage Proof:2200V(DC)

1-6.Life:

a. Without load(Contact/Disconnect Cycles):To 10000

b. With Load(Hot Plug 250 Cycles& 120V):60A

1-7.Flammability:UL94 V-0

1-8.Average.Connection/disconnect(N):

a. The insertion force of finished products: ≥ 2.5 kgf

b. The pullout force of finished products: ≥ 3 kgf

c. The pulling capacity between wire and terminal, It' s in line with UL standard

1-9.Contact Barrel Wire Size(AWG):02AWG~6AWG

1-10.Connector holding force(LBF):450N Min

1-11.Environment Temperatures(°C):-20℃--125℃

2. Material and Surface performance

2-1.Material of terminal: Red copper

2-2.Process of production: Precision punching

2-3.Fully Ag-plating on surface, it's Ag-plating thickness is 1μm

2-4.Shrapnel:Stainless steel

2.5.Process of production: Precision punching

2-6.Housing: Material PC

2-7. Process of production: Plastic Injection

三、(Packing and Storage)

1. Standard packing qty: 150pcs/carton for connector; 150pcs/bag for terminal; mate with way:1connector uses 2 terminal.

2.The products storage condition: temperature: 5-30℃ ,relative humidity:80%, store in no acidic nor alkaline and no corrosive atmosphere warehouse, storage period: 2years.

SPECIFICATION

Product Name

Single power connector


Part No

SD120 Series

四、Ordering Information


1.Housing

Part Number	Housing Color	Part Number	Housing Color
SD120H-BL	Black	SD120H-GR	Green
SD120H-BR	Brown	SD120H-BU	Blue
SD120H-RE	Red	SD120H-PU	Purple
SD120H-OR	Orange	SD120H-GY	Gray
SD120H-YE	Yellow	SD120L-WH	White

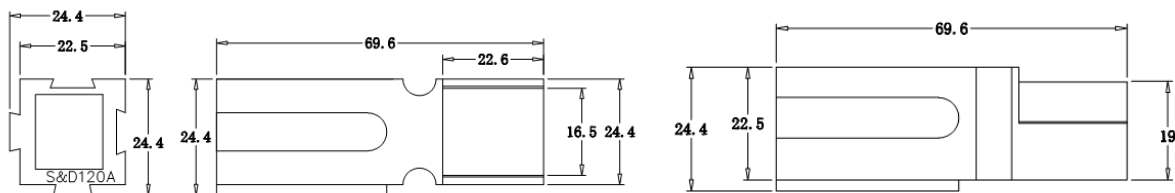

2.Terminal

Part Number	-A- (mm)	-B- (mm)	-C- (mm)	-D- (mm)	Wire size	Current
SGD6811G2-T	50.7	10.8	8.7	21	2AWG	120A
SGD6811G4-T	50.7	10.8	7.5	21	4AWG	120A
SGD6811G6-T	50.7	10.8	5.6	21	6AWG	120A

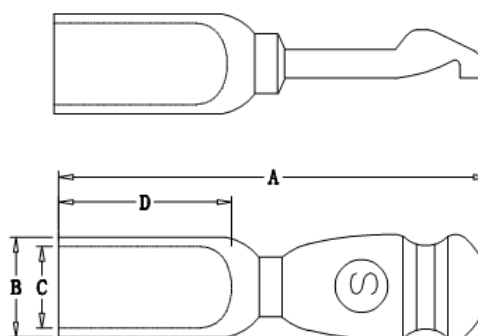

Item	Name	QTY	Material	Remarks				
1	Housing	1	PC					
2	Shrapnel	1	Stainless steel					
3	Terminal	1	Red copper	Ag-plating				
Revision	Change the content			Date	Producer	Corrector	Approved	
					Anne	Jack	David Xiao	
					Proportion		1:1	
					Unit		MM	