

SPECIFICATION

Product Name

Multipole power connector

一、 Outline and dimensions: Outline and dimensions of the connector is shown on the following drawing

二、 Technical Parameters:

1. Product Specifications

1-1.Rated current(Amperes): 50A

1-2.Rated voltage(Volts): 600V

1-3.Insulation Resistance:5000M Ω

1-4.contact Resistance(m Ω):0.055 $\pm$ 0.005

1-5.Voltage Proof:2200V(DC)

1-6.Life:

a. Without load(Contact/Disconnect Cycles):To 10000

b. With Load(Hot Plug 250 Cycles& 120V):40A

1-7.Flammability:UL94 V-0

1-8.Average.Connection/disconnect(N):95 $\pm$ 5N

a. The pulling capacity between wire and terminal, It' s in line with UL standard

1-9.Contact Barrel Wire Size(AWG):6AWG~10/12AWG

1-10.Connector holding force(LBF):250N Min

1-11.Environment Temperatures($^{\circ}$ C):-20 $^{\circ}$ C---125 $^{\circ}$ C

2.Material and Surface performance

2-1.Material of terminal: Red copper

2-2.Process of production: Precision punching

2-3.Fully Ag-plating on surface, it's Ag-plating thickness is 1 μ m

2-4.Shrapnel:Stainless steel

2.5.Process of production: Precision punching

2-6.Housing: Material PC

2-7. Process of production: Plastic Injection

三、 (Packing and Storage)

1. Standard packing qty: 50pcs/bag for connector; 100pcs/bag for terminal; mate with way: 1connector uses 2 terminal.

2.The products storage condition: temperature: 5-30 $^{\circ}$ C ,relative humidity:80%, store in no acidic nor alkaline and no corrosive atmosphere warehouse, storage period: 2years.

SPECIFICATION


Product Name

Multipole power connector

四、Ordering Information

1.Housing

Part Number	Housing Color	Part Number	Housing Color
SG50H-BL	Black	SG50H-GR	Green
SG50H-BR	Brown	SG50H-BU	Blue
SG50H-RE	Red	SG50H-PU	Purple
SG50H-OR	Orange	SG50H-GY	Gray
SG50H-YE	Yellow	SG50L-WH	White

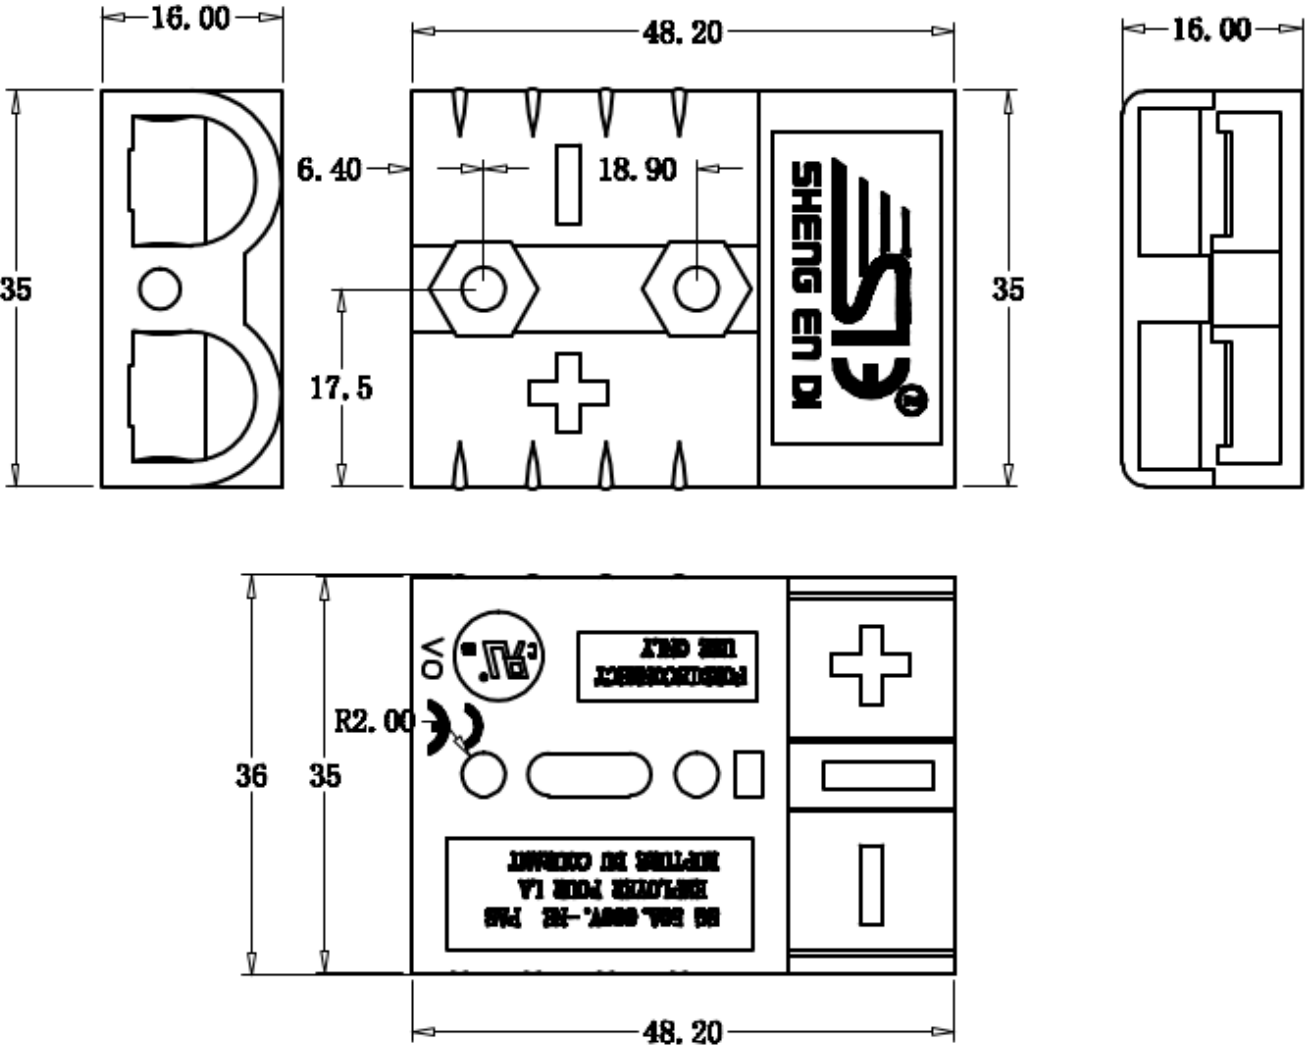


SPECIFICATION

Product Name

Multipole power connector

2.Terminal

Part Number	-A-(mm)	-B-(mm)	-C-(mm)	-D-(mm)	Wire size	Current
SGD5900-T	29.6	6.9	5.7	12.5	6AWG	50A
SGD5952-T	29.6	6.9	4.7	12.5	8AWG	50A
SGD5915-T	29.6	6.9	3.5	12.2	10-12AWG	50A

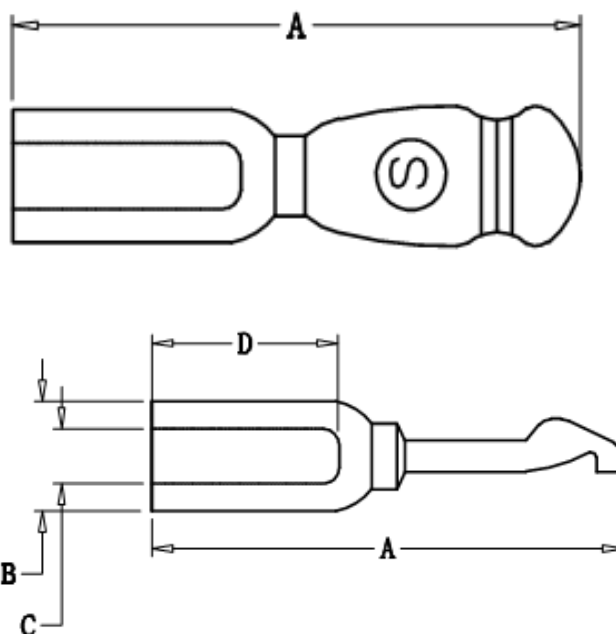

Item	Name	QTY	Material	Remarks				
1	Housing	1	PC					
2	Shrapnel	2	Stainless steel					
3	Terminal	2	Red copper	Ag-plating thickness				
Revision	Change the content			Date	Producer	Corrector	Approved	
					Anne	Jack	David Xiao	
					Proportion		1:1	
					Unit		MM	


SPECIFICATION

Product Name

Multipole power connector


3.Handle

Part Number	-A- (mm)	-B- (mm)	-C- (mm)	-D- (mm)	-E- (mm)	-F- (mm)
SG112G1-RE	5.5	14.5	49	9.6	5.8	4.0
SG112G1-GY	9.6	49	3.5	19.0	14.5	55.5

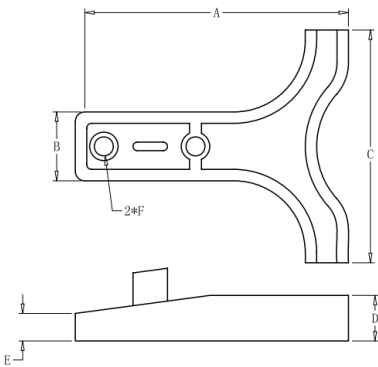

4. Dust cover:

Part Number
SG111F1-RE
SG111F1-BL

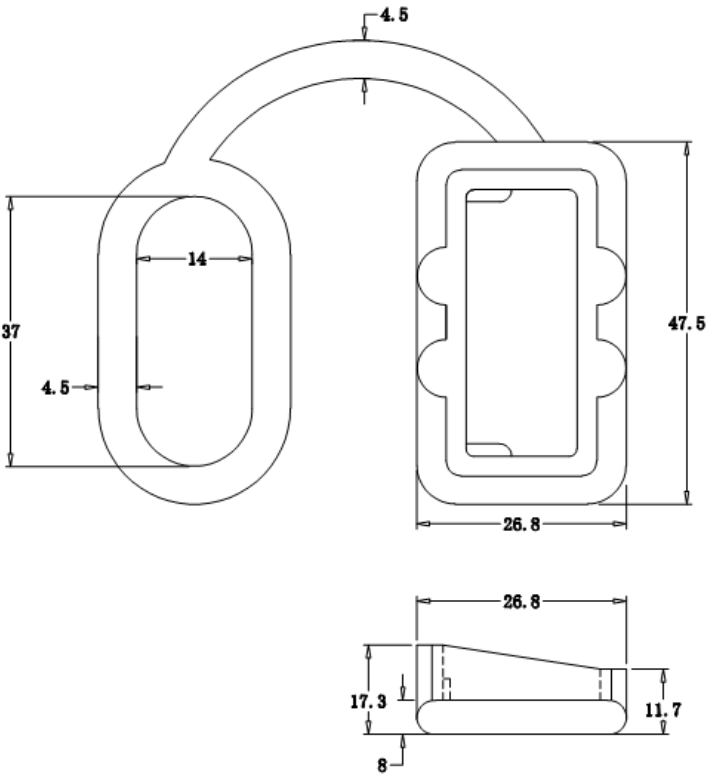



SPECIFICATION

Product Name

Multipole power connector



5. Dust cover:

Part Number
SG111F2-BL

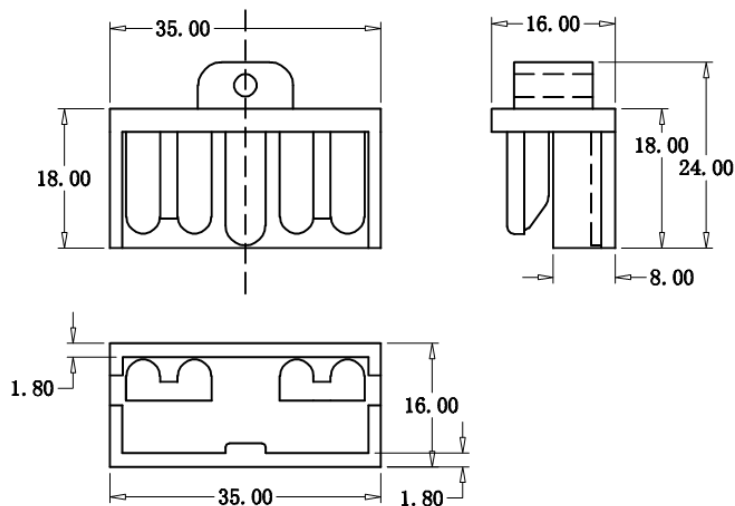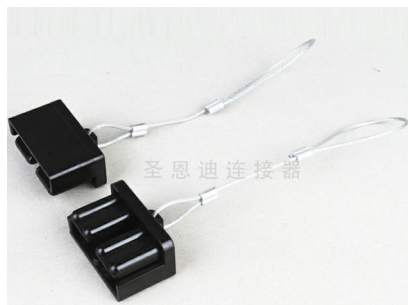

6. Solid line plug:

Part Number
SG111F3-RE
SG111F3-BL

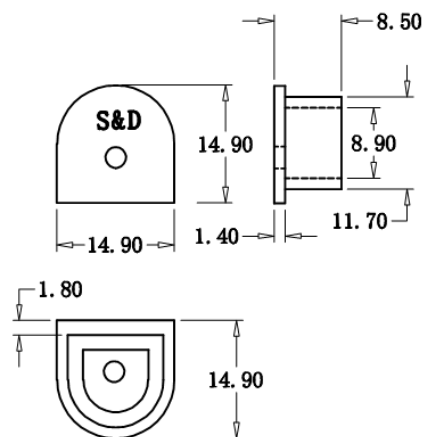

SPECIFICATION

Product Name

Multipole power connector

7. waterproof plug:

Part Number
HU50A-RE
HU50A-BL

